

ZAPO

捷博科技

W22

**WiFi Dual-band 1X1 11ac +
Bluetooth V4.1**

Module Datasheet

Revision History

Date	Revision Content	Revised By	Version
2016/06/30	-Preliminary	Ken	1.0
2016/07/25	-Modifying the USB pin defined	William	1.1

Contents

Contents.....	2
1.	
Introduction.....	3
2.	
Features.....	
4	
3. General	
Specification.....	5
3.1 General	
Specification.....	5
3.1.2 Recommended Operating Rating.....	5
4. WiFi RF	
Specification.....	6
4.2 5GHz RF Specification.....	7
5. Bluetooth Specification.....	
10	
5.1 Bluetooth	
Specification.....	10
6. Pin	
Assignments.....	11
6.1 Pin	
Outline.....	11
6.2 Pin	
Definition.....	11
7.	
Dimensions.....	13
7.1 Physical	
Dimensions.....	13
7.2 Layout	
Recommendation.....	15
8. Reference Design.....	
16	
9. Recommended Reflow Profile.....	17
10. Package Information.....	
18	
TBD.....	
....	18

1. Introduction

W22 Technology would like to announce a low-cost and low-power consumption module which has all of the Wi-Fi, Bluetooth functionalities. The highly integrated module makes the possibilities of web browsing, VoIP, Bluetooth headsets applications. With seamless roaming capabilities and advanced security, also could interact with different vendors' 802.11a/b/g/n/ac Access Points in the wireless LAN.

The wireless module complies with IEEE 802.11 a/b/g/n/ac standard and it can achieve up to a speed of 433.3Mbps with single stream in 802.11ac draft to connect to the wireless LAN. The integrated module provides USB2.0 interface for Wi-Fi, USB1.1 / PCM interface for Bluetooth.

This compact module is a total solution for a combination of Wi-Fi + BT technologies. The module is specifically developed for Smart phones and Portable devices.

2. Features

Highly integrated wireless local area network(WLAN) system-on-chip (SOC) for 5 GHZ 802.11ac, or 2.4G/5G 802.11n WLAN applications.

Supports 20/40MHz at 2.4GHz and supports 20/40/80MHz at 5GHz

Supports USB2.0 interface for WLAN and USB1.1/PCM interface for Bluetooth.

Supports Bluetooth V4.1+HS, BLE and be backwards compatible with Bluetooth 1.2, 2.X+ enhance data rate.


Supports WLAN-Bluetooth coexistence and ISM-LTE coexistence.

Supports Bluetooth for class1 and class2 power level transmissions without requiring an external PA.

BT host digital interface:

- USB1.1
- PCM for audio data

The block diagram of module is depicted in the figure below.

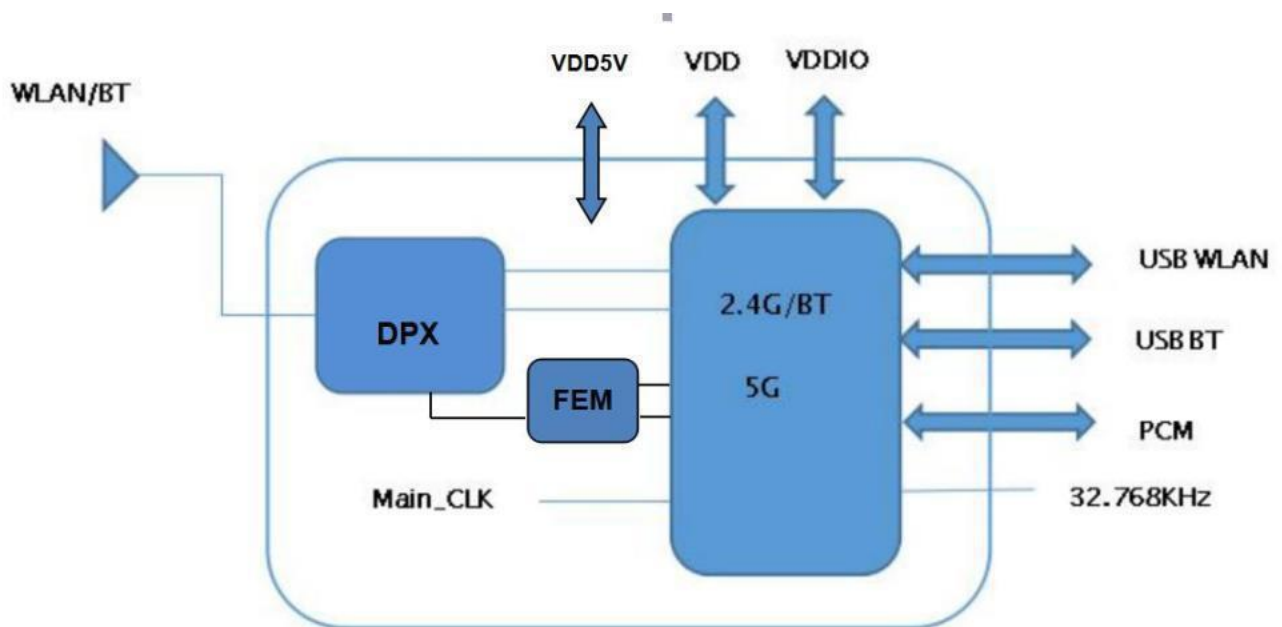

3. General Specification

3.1 General Specification

Model Name	8223A-UUH
Product Description	Support WiFi/Bluetooth functionalities
Dimension	L x W x H: 12 x 12 x 1.5 (typical) mm
WiFi Interface	Support USB2.0
BT Interface	USB1.1 / PCM
Operating temperature	-10°C to 70°C
Storage temperature	-40°C to 85°C

3.1.2 Recommended Operating Rating

	Min.	Typ.	Max.	Unit
Operating Temperature	-30	25	85	deg.C
VCC5V	4.8	5	5.2	V
VCC33	3.15	3.3	3.45	V
VDDIO	1.7	1.8 or 3.3	3.45	V

4. WiFi RF Specification

4.1 2.4GHz RF Specification

Feature	Description
WLAN Standard	IEEE 802.11b/g/n/ac, WiFi compliant
Frequency Range	2.400 GHz ~ 2.497 GHz (2.4 GHz ISM Band)
Number of Channels	2.4GHz: Ch1 ~ Ch14
Output Power	802.11b /CCK : 24 dBm ± 2 dB @ EVM -9dB
	802.11g /64-QAM(R=3/4) : 21 dBm ± 2 dB @ EVM -25dB
	802.11n /64-QAM(R=5/6) : 19 dBm ± 2 dB @ EVM -28dB
Receive Sensitivity (11b) @8% PER	- 1Mbps PER @ -96 dBm, typical
	- 2Mbps PER @ -90 dBm, typical
	- 5.5Mbps PER @ -88 dBm, typical
	- 11Mbps PER @ -87 dBm, typical
Receive Sensitivity (11g) @10% PER	- 6Mbps PER @ -90 dBm, typical
	- 9Mbps PER @ -88 dBm, typical
	- 12Mbps PER @ -87 dBm, typical
	- 18Mbps PER @ -85 dBm, typical
	- 24Mbps PER @ -83 dBm, typical
	- 36Mbps PER @ -80 dBm, typical
	- 48Mbps PER @ -76 dBm, typical
	- 54Mbps PER @ -74 dBm, typical
Receive Sensitivity (11n,20MHz) @10% PER	- MCS=0 PER @ -89 dBm, typical
	- MCS=1 PER @ -85 dBm, typical
	- MCS=2 PER @ -84 dBm, typical
	- MCS=3 PER @ -80 dBm, typical
	- MCS=4 PER @ -77 dBm, typical
	- MCS=5 PER @ -75 dBm, typical
	- MCS=6 PER @ -72 dBm, typical
	- MCS=7 PER @ -71 dBm, typical
Receive Sensitivity (11n,40MHz) @10% PER	- MCS=0 PER @ -89 dBm, typical
	- MCS=1 PER @ -85 dBm, typical
	- MCS=2 PER @ -84 dBm, typical
	- MCS=3 PER @ -80 dBm, typical
	- MCS=4 PER @ -76 dBm, typical
	- MCS=5 PER @ -72 dBm, typical
	- MCS=6 PER @ -70 dBm, typical

	- MCS=7 PER @ -69 dBm, typical
Receive Sensitivity (11ac,20MHz) @10% PER	- MCS=0 PER @ -90 dBm, typical
	- MCS=1 PER @ -87 dBm, typical
	- MCS=2 PER @ -86 dBm, typical
	- MCS=3 PER @ -82 dBm, typical
	- MCS=4 PER @ -79 dBm, typical
	- MCS=5 PER @ -75 dBm, typical
	- MCS=6 PER @ -73 dBm, typical
	- MCS=7 PER @ -72 dBm, typical
	- MCS=8 PER @ -67 dBm, typical
Receive Sensitivity (11ac,40MHz) @10% PER	- MCS=0 PER @ -88 dBm, typical
	- MCS=1 PER @ -85 dBm, typical
	- MCS=2 PER @ -83 dBm, typical
	- MCS=3 PER @ -80 dBm, typical
	- MCS=4 PER @ -77 dBm, typical
	- MCS=5 PER @ -72 dBm, typical
	- MCS=6 PER @ -71 dBm, typical
	- MCS=7 PER @ -69 dBm, typical
	- MCS=8 PER @ -65 dBm, typical
	- MCS=9 PER @ -64 dBm, typical

4.2 5GHz RF Specification

Feature	Description
WLAN Standard	IEEE 802.11a/b/g/n/ac, Wi-Fi compliant
Frequency Range	4.900 GHz ~ 5.845 GHz (5.0 GHz ISM Band)
Number of Channels	5.0GHz: Please see the table
Modulation	802.11a/n : 64-QAM,16-QAM ¹ , QPSK, BPSK 802.11ac : 256-QAM, 64-QAM,16-QAM, QPSK, BPSK
Output Power	802.11a /64-QAM(R=3/4) : 20 dBm ± 2 dB @ EVM -25dB
	802.11n /64-QAM(R=5/6) : 18 dBm ± 2 dB @ EVM -28dB
	802.11ac/256-QAM(R=3/4) : 15 dBm ± 2 dB @ EVM -30dB
	802.11ac/256-QAM(R=5/6) : 14 dBm ± 2 dB @ EVM -32dB
Receive Sensitivity (11a, 20MHz) @10%	- 6Mbps PER @ -91 dBm, typical
	- 9Mbps PER @ -89 dBm, typical
	PER- 12Mbps PER @ -88 dBm, typical

	- 18Mbps	PER @ -86 dBm, typical
	- 24Mbps	PER @ -82 dBm, typical
	- 36Mbps	PER @ -79 dBm, typical
	- 48Mbps	PER @ -74 dBm, typical
	- 54Mbps	PER @ -73 dBm, typical
Receive Sensitivity (11n,20MHz) @10% PER	- MCS=0	PER @ -90 dBm, typical
	- MCS=1	PER @ -88 dBm, typical
	- MCS=2	PER @ -85 dBm, typical
	- MCS=3	PER @ -82 dBm, typical
	- MCS=4	PER @ -78 dBm, typical
	- MCS=5	PER @ -74 dBm, typical
	- MCS=6	PER @ -72 dBm, typical
	- MCS=7	PER @ -71 dBm, typical
Receive Sensitivity (11n,40MHz) @10% PER	- MCS=0	PER @ -88 dBm, typical
	- MCS=1	PER @ -85 dBm, typical
	- MCS=2	PER @ -83 dBm, typical
	- MCS=3	PER @ -79 dBm, typical
	- MCS=4	PER @ -76 dBm, typical
	- MCS=5	PER @ -71 dBm, typical
	- MCS=6	PER @ -70 dBm, typical
	- MCS=7	PER @ -68 dBm, typical
Receive Sensitivity (11ac,20MHz) @10% PER	- MCS=0	PER @ -89 dBm, typical
	- MCS=1	PER @ -87 dBm, typical
	- MCS=2	PER @ -84 dBm, typical
	- MCS=3	PER @ -81 dBm, typical
	- MCS=4	PER @ -77 dBm, typical
	- MCS=5	PER @ -73 dBm, typical
	- MCS=6	PER @ -71 dBm, typical
	- MCS=7	PER @ -70 dBm, typical
	- MCS=8	PER @ -66 dBm, typical
Receive Sensitivity (11ac,40MHz) @10% PER	- MCS=0	PER @ -87 dBm, typical
	- MCS=1	PER @ -83 dBm, typical
	- MCS=2	PER @ -81 dBm, typical
	- MCS=3	PER @ -78 dBm, typical
	- MCS=4	PER @ -75 dBm, typical
	- MCS=5	PER @ -70 dBm, typical
	- MCS=6	PER @ -68 dBm, typical

	- MCS=7	PER @ -66 dBm, typical
	- MCS=8	PER @ -64 dBm, typical
	- MCS=9	PER @ -63 dBm, typical
Receive Sensitivity (11ac,80MHz) @10% PER	- MCS=0	PER @ -83 dBm, typical
	- MCS=1	PER @ -80 dBm, typical
	- MCS=2	PER @ -78 dBm, typical
	- MCS=3	PER @ -74 dBm, typical
	- MCS=4	PER @ -71 dBm, typical
	- MCS=5	PER @ -69 dBm, typical
	- MCS=6	PER @ -65 dBm, typical
	- MCS=7	PER @ -63 dBm, typical
	- MCS=8	PER @ -60 dBm, typical
	- MCS=9	PER @ -59 dBm, typical

15GHz Channel table

Band (GHz)	Operating Channel Numbers	Channel center frequencies(MHz)
5.15GHz~5.25GHz	36	5180
	40	5200
	44	5220
	48	5240
5.25GHz~5.35GHz	52	5260
	56	5280
	60	5300
	64	5320
5.5GHz~5.7GHz	100	5500
	104	5520
	108	5540
	112	5560
	116	5580
	120	5600
	124	5620
	128	5640
	132	5660
	136	5680
5.725GHz~5.825GHz	140	5700
	149	5745
	153	5765
	157	5785
	161	5805
	165	5825


5. Bluetooth Specification

5.1 Bluetooth Specification

Feature	Description		
General Specification			
Bluetooth Standard	Bluetooth V4.1 of 1, 2 and 3 Mbps.		
Host Interface	UART		
Antenna Reference	Small antennas with 0~2 dBi peak gain		
Frequency Band	2402 MHz ~ 2480 MHz		
Number of Channels	79 channels		
Modulation	FHSS, GFSK, DPSK, DQPSK		
RF Specification			
	Min.	Typical.	Max.
Output Power (Class 1.5)		8 dBm	
Sensitivity @ BER=0.1% for GFSK (1Mbps)		-92 dBm	
Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)		-92 dBm	
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)		-85 dBm	
Maximum Input Level	GFSK (1Mbps):-20dBm		
	$\pi/4$ -DQPSK (2Mbps) :-20dBm		
	8DPSK (3Mbps) :-20dBm		

6. Pin Assignments

6.1 Pin Outline

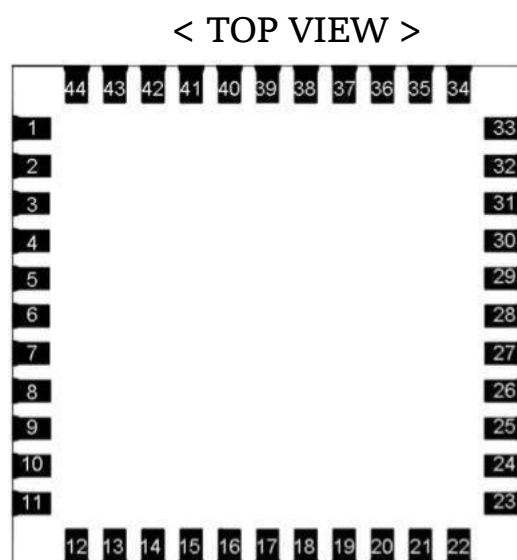

6.2 Pin Definition

NO	Name	Type	Description
1	GND	—	Ground connections
2	WL_BT_ANT	I/O	RF I/O port
3	GND	—	Ground connections
4	NC	—	Floating (Don't connected to ground)
5	NC	—	Floating (Don't connected to ground)
6	NC	—	Floating (Don't connected to ground)
7	BT_WAKE_HOST	O	Bluetooth device to wake-up HOST
8	NC	—	Floating (Don't connected to ground)
9	VCC33	P	Main power voltage source input 3.3V
10	NC	—	Floating (Don't connected to ground)
11	VCC5V	P	Power voltage for 5g and 2.4g FEM
12	WL_EN	I	Enable pin for WLAN device ON: pull high ; OFF: pull low
13	WL_HOST_WAKE	O	WLAN to wake-up HOST


14	GND	—	Ground connections
15	BT_USB_DP	AI/AO	USB1.1 differential pair for Bluetooth
16	BT_USB_DM	AI/AO	USB1.1 differential pair for Bluetooth
17	GND	—	Ground connections
18	WL_USB_DM	AI/AO	USB2.0 differential pair for WLAN
19	WL_USB_DP	AI/AO	USB2.0 differential pair for WLAN
20	GND	—	Ground connections
21	BUCK_LX	P	External buck inductor
22	VDDIO	P	I/O Voltage supply input 1.8V or 3.3V
23	VIN_LDO	P	Buck feedback input
24	LPO	I	External Low Power Clock input (32.768KHz)
25	PCM_OUT	O	PCM Data output
26	PCM_CLK	I/O	PCM clock
27	PCM_IN	I	PCM data input
28	PCM_SYNC	I/O	PCM sync signal
29	NC	—	Floating (Don't connected to ground)
30	NC	—	Floating (Don't connected to ground)
31	GND	—	Ground connections
32	NC	—	Floating (Don't connected to ground)
33	GND	—	Ground connections
34	BT_EN	I	Enable pin for Bluetooth device ON: pull high ; OFF: pull low
35	NC	—	Floating (Don't connected to ground)
36	GND	—	Ground connections
37	NC	—	Floating (Don't connected to ground)
38	NC	—	Floating (Don't connected to ground)
39	NC	—	Floating (Don't connected to ground)
40	NC	—	Floating (Don't connected to ground)
41	NC	—	Floating (Don't connected to ground)
42	NC	—	Floating (Don't connected to ground)
43	NC	—	Floating (Don't connected to ground)
44	NC	—	Floating (Don't connected to ground)

7. Dimensions

7.1 Physical Dimensions

(Unit: mm)

< TOP VIEW >

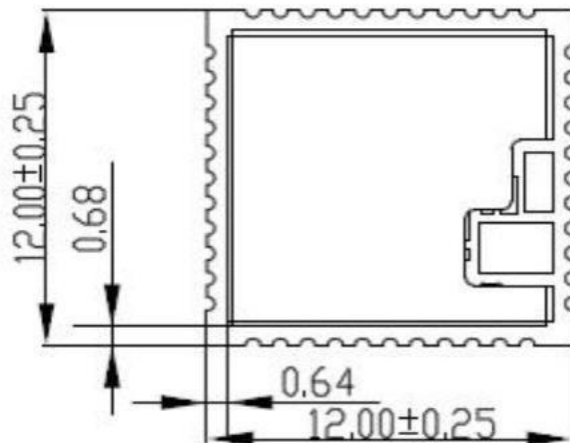


< Side View >



Marking Description


< TOP VIEW >

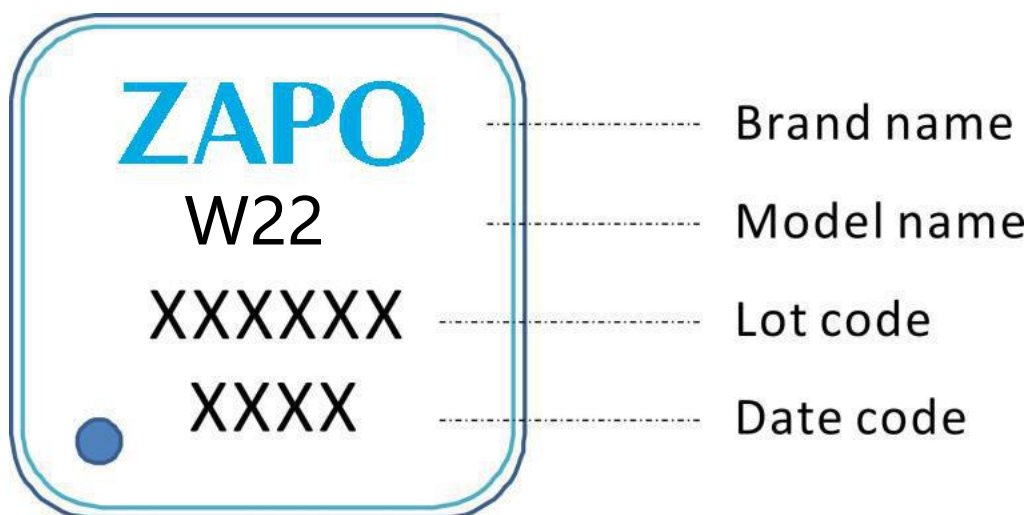

Module Physical Dimensions

(Unit: mm)


< TOP VIEW >

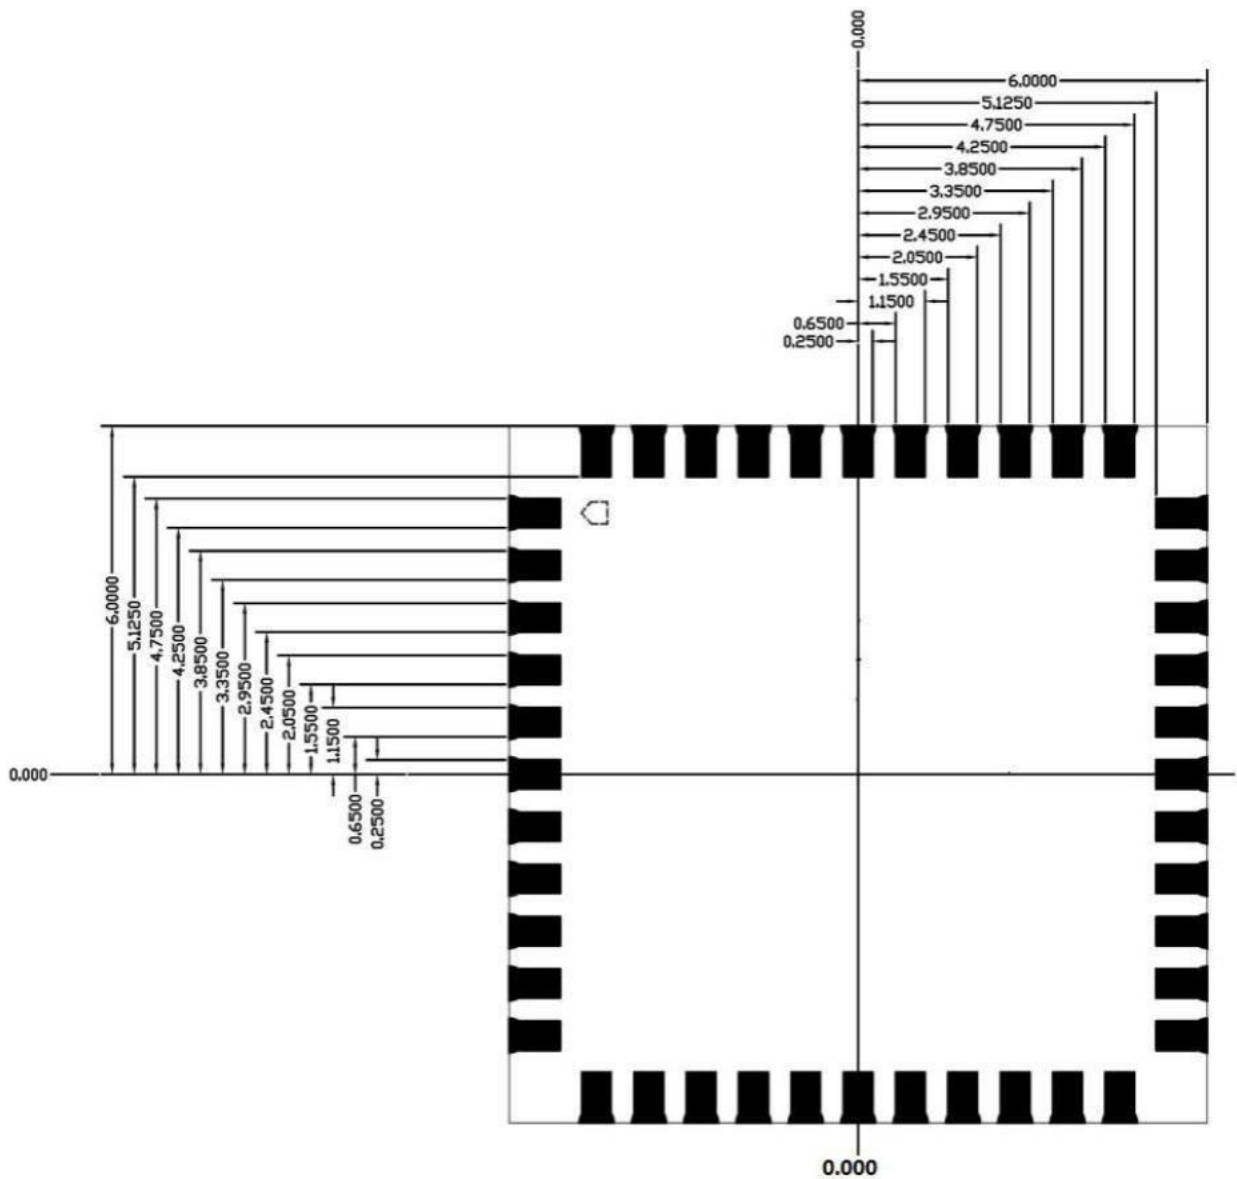


7.2 Layout Recommendation

(Unit: mm)

< TOP VIEW >

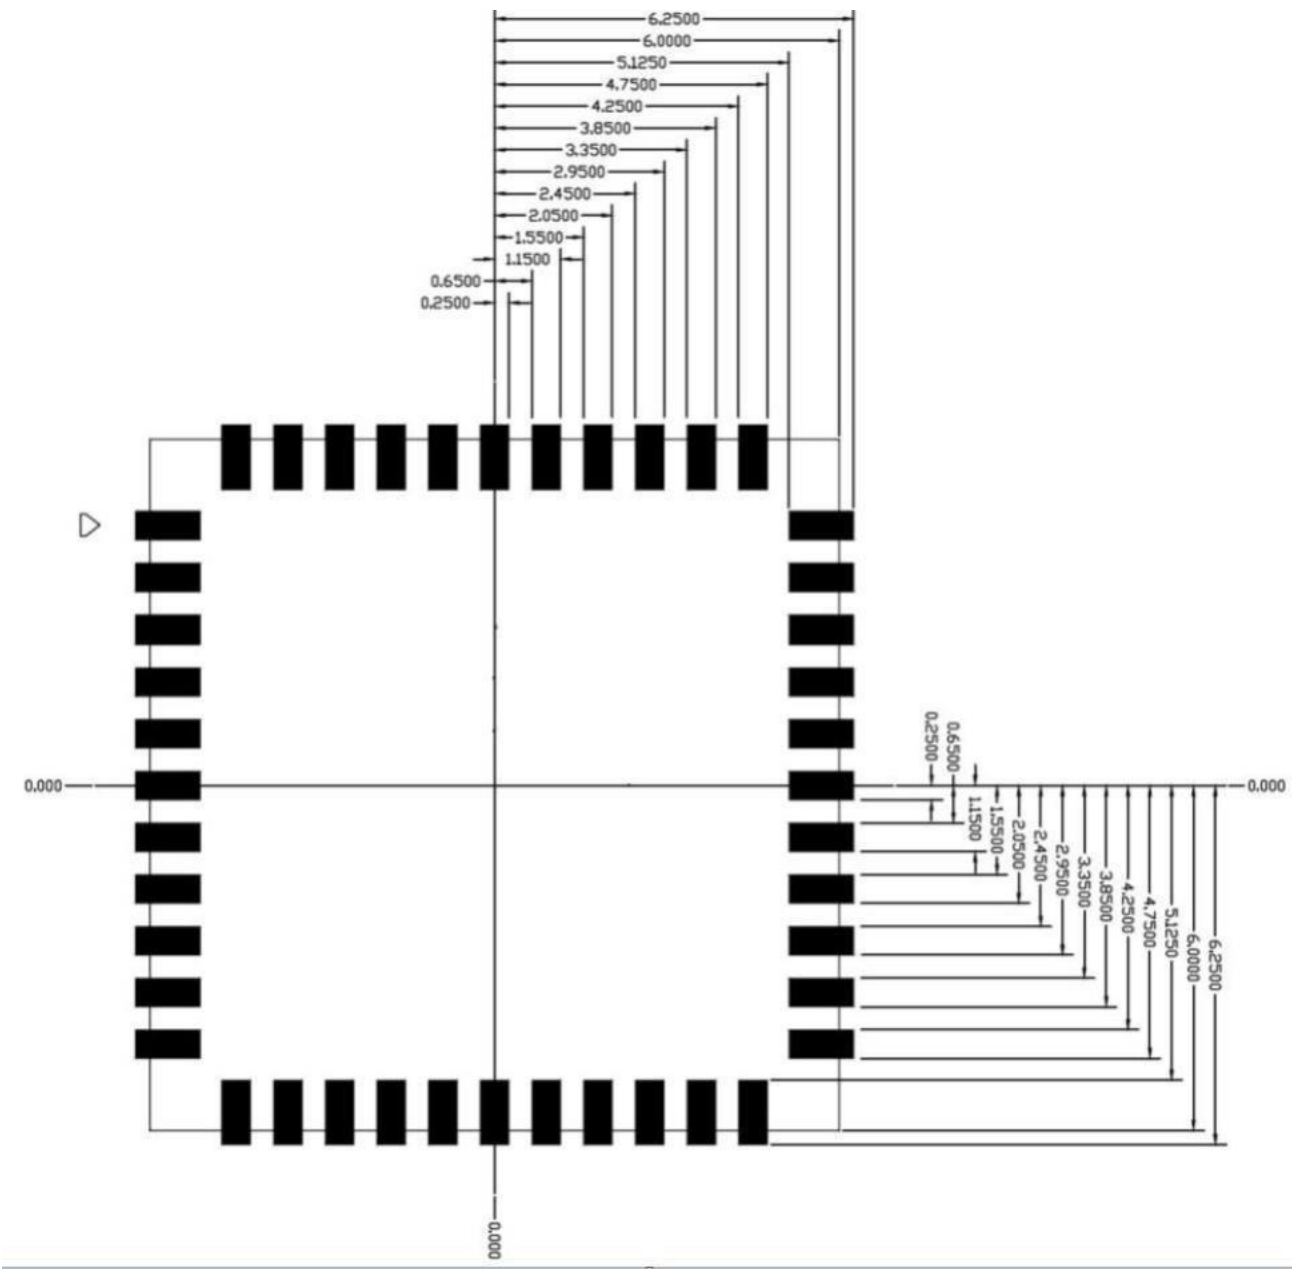

8. Reference Design

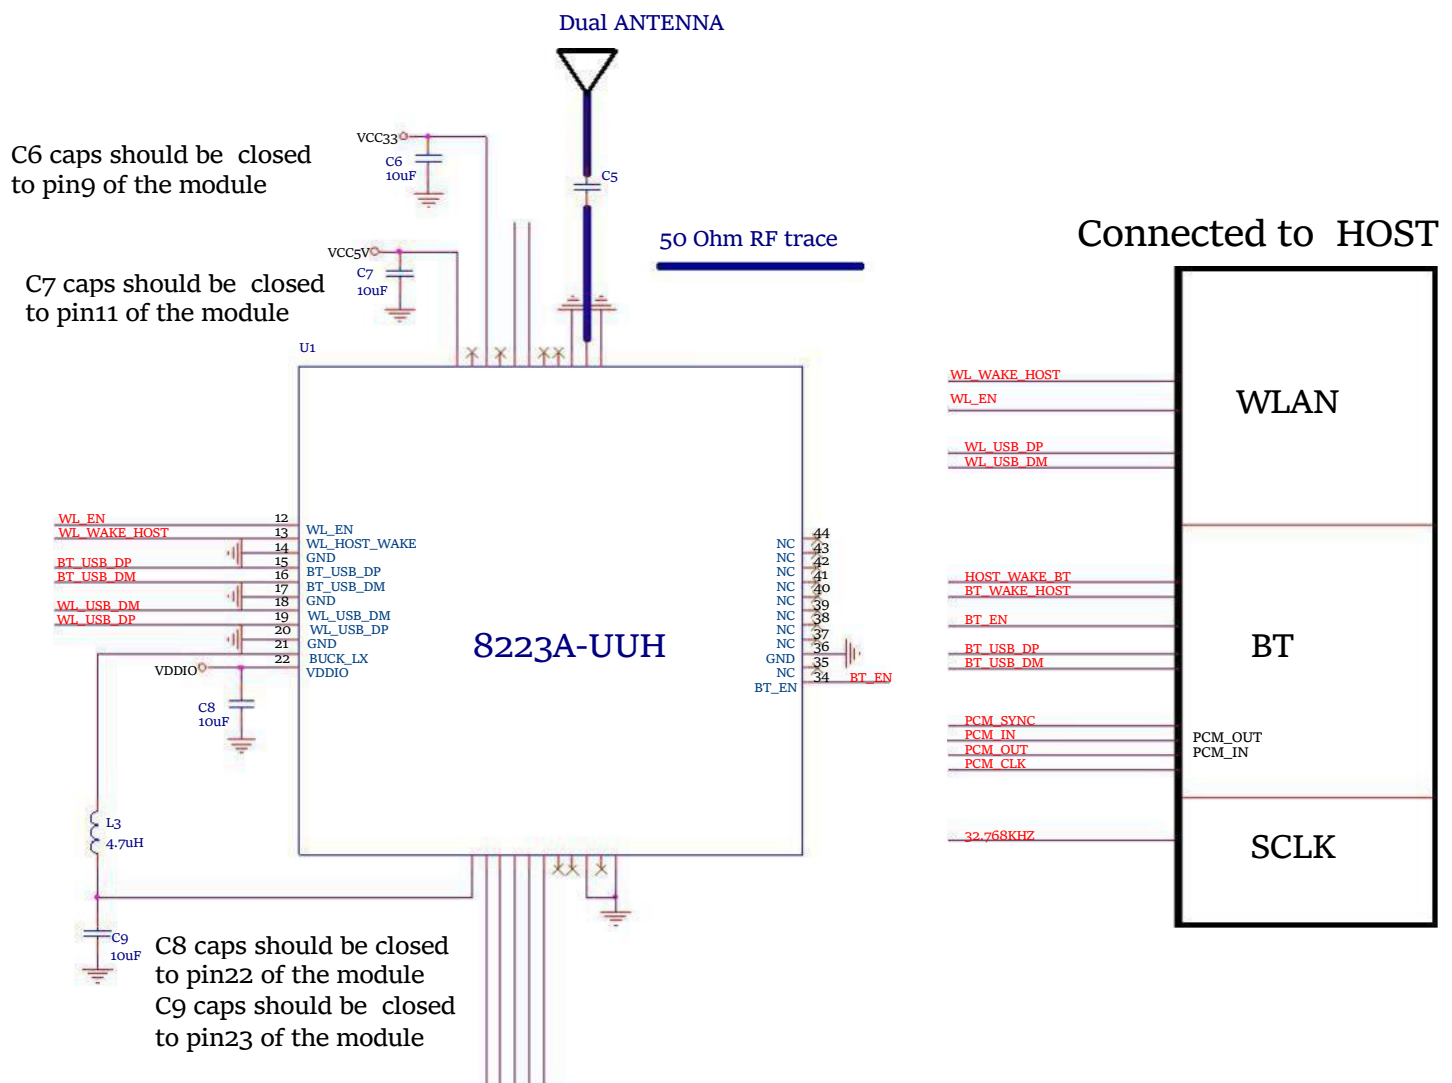

Note1:USB_DP, USB_DM layout traces should be 90ohm of PCB impedance.


Note2:VCC5V and VCC3V3 that driving currents should be 700mA or above from HOST PMU.

9. Recommended Reflow Profile

Referred to IPC/JEDEC standard.

Peak Temperature : $<250^{\circ}\text{C}$

Number of Times : 2 times

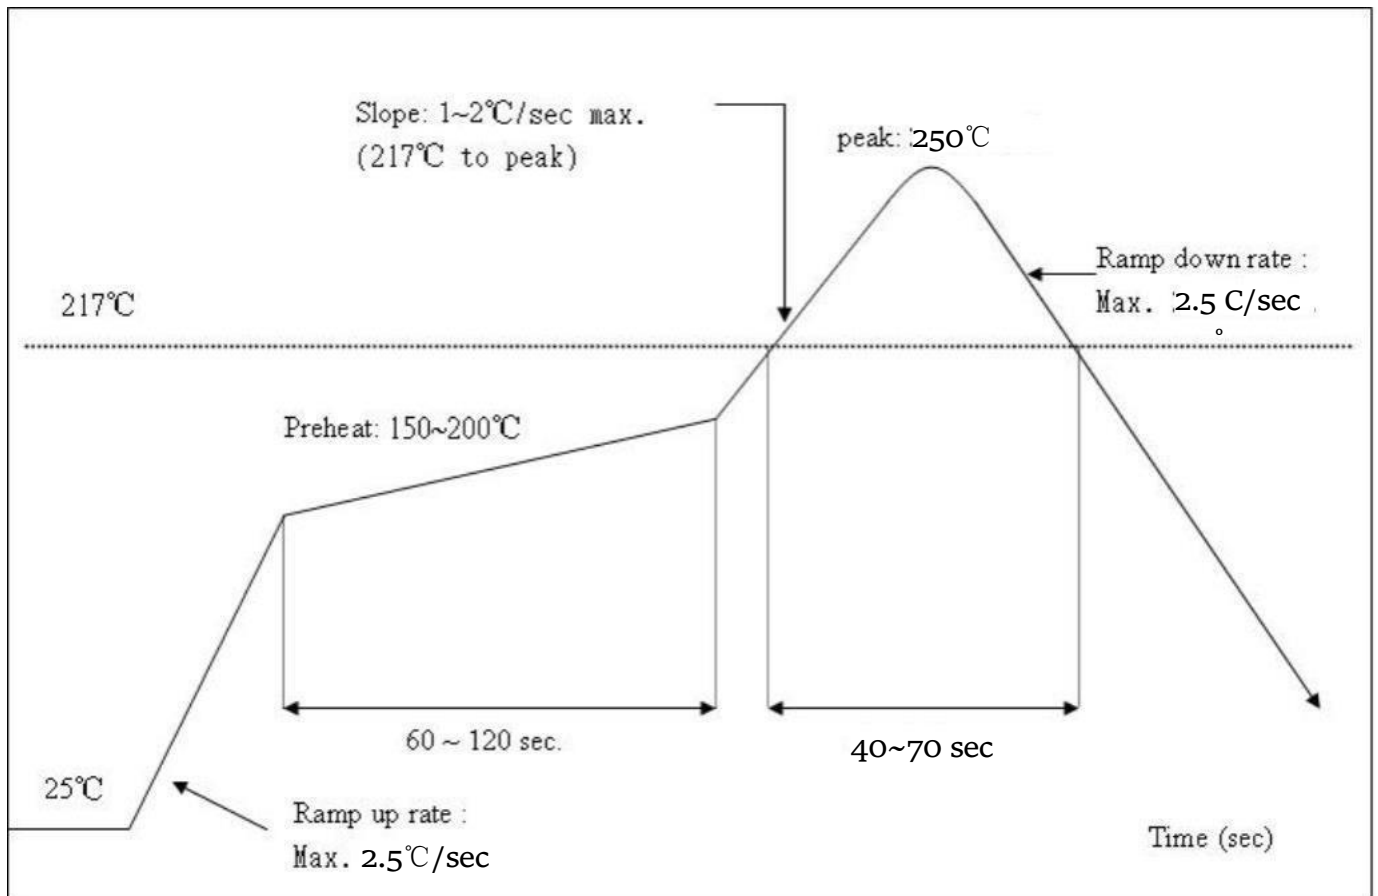

10. Package Information

TBD